

Delavan 12 Volt Pumps Specification Sheet



APD0038

Delavan 12 Volt Pumps 2200 Series

Unit Specifications

Item	Description	Details
Pump Models	ADP0038	2 chamber, positive displacement self priming, capable of being run dry
Motor	12VDC	Permanent magnet, thermally protected, splash proof
Liquid Temp.		43°C (110°F) max.
Priming Capabilities		1.2m suction lift (4ft)
Max. Pressure		2.8 bar, 40psi pressure demand switch
Open Flow		3.8L/min
Housing	Motor housing	Nylon 6/6
	Pump housing	Polypropylene
Valves		Viton
Diaphragm		Santoprene
Leads		18 AWG, 0.23m (230mm)
Inlet/Outlet Ports		3/8" hose barb
Power Supply		2 pin electrical connector
Duty Cycle		Stainless steel and zinc plated
Fasteners		Intermittent
Weight		0.57kgs


1

Delavan 12 Volt Pumps Specification Sheet

Pump Performance - ADP0038

PSI	LPM	Amps
0-3	3.7	1.5
10	3.1	1.9
20	2.6	2.1
30	2.3	2.4
40	1.6	2.6

Pump Dimensions (in/mm) - ADP0038

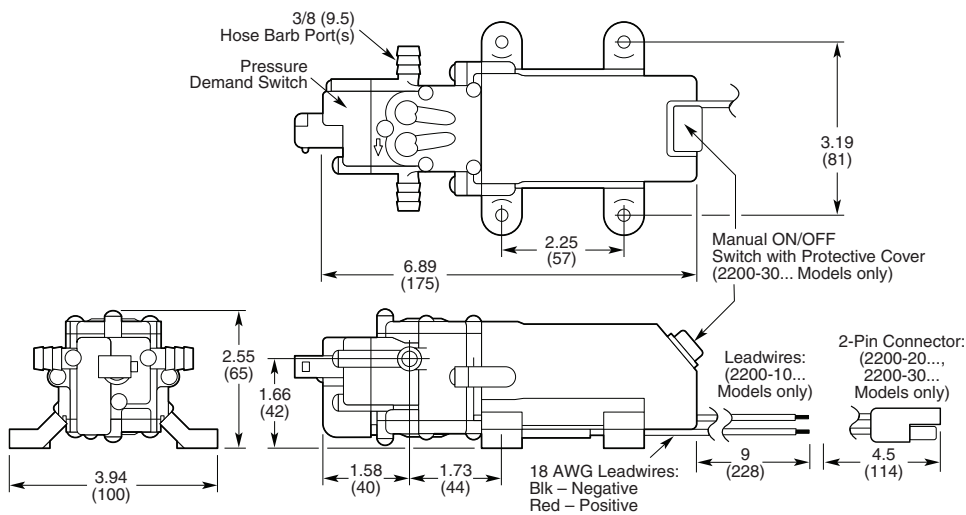

2

Delavan Pump Accessories



Wire Harness Kit - ATCWL03612USAC

- 3.6 metre wire harness kit with on/off switch, fuse, 2 pin connector, alligator clips and lighter adaptor for vehicles
- Max 10 Amp draw



Pressure Switch - CDP2200PSW